

# Supplementary Information


## Non-Enzymatic Amperometric Determination of Glucose by CuO Nanobelt Graphene Composite Modified Glassy Carbon Electrode

Sreeramareddy Muralikrishna,<sup>a</sup> Kempahanumakkagari Sureshkumar,<sup>a</sup> Zhou Yan,<sup>b</sup>  
Carlos Fernandez<sup>c</sup> and Thippeswamy Ramakrishnappa<sup>\*,a</sup>


<sup>a</sup>Center for Nano and Material Science, Global Campus, Jain University, Jakkasandra (P),  
Kankapura (T), 560001 Bangalore, Karnataka, India

<sup>b</sup>Department of Chemistry, School of Science, China University of Petroleum (East China),  
266580 Qingdao, China


<sup>c</sup>School of Pharmacy and Life Sciences, Robert Gordon University, Garthdee Road,  
AB10 7GJ Aberdeen, United Kingdom

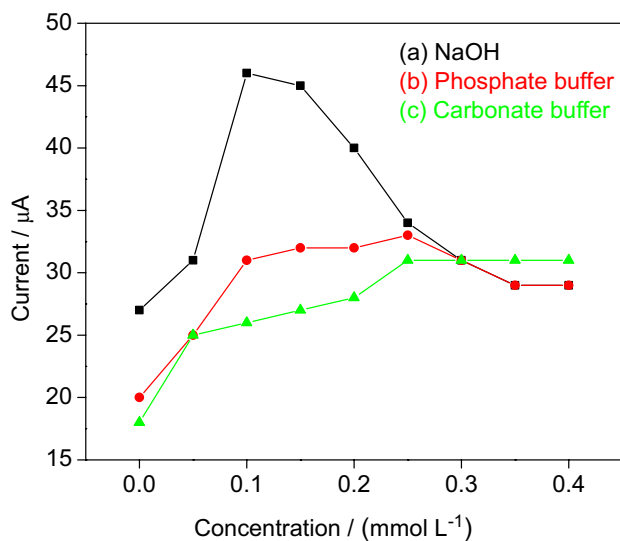

**Figure S1.** The oxidation currents obtained in different electrolytes in amperometry (a) NaOH; (b) carbonate buffer and (c) phosphate buffer (applied oxidation potential 0.5 V, 1.0  $\mu\text{mol L}^{-1}$  glucose).

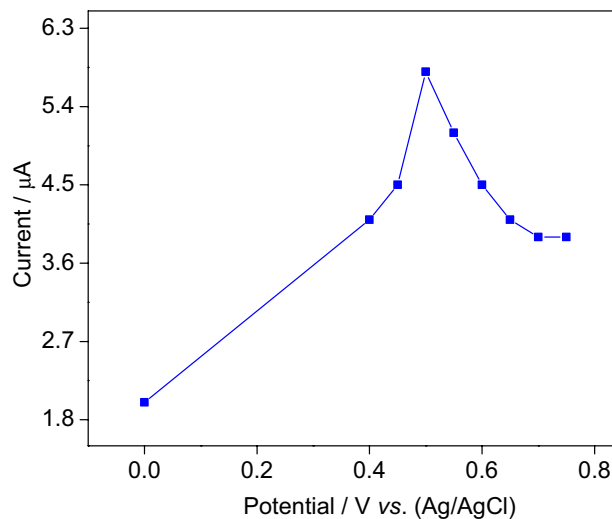

**Figure S2.** The oxidation currents obtained at different applied oxidation potential in amperometry (0.1 mol L<sup>-1</sup> NaOH, 1.0  $\mu\text{mol L}^{-1}$  glucose).

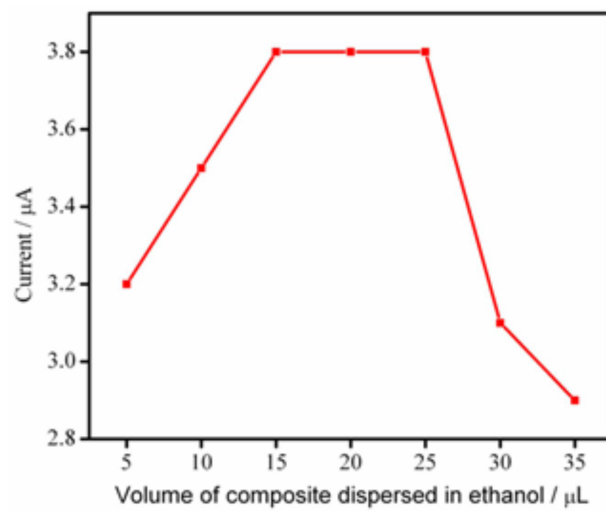

**Figure S3.** The effect of amount of composite deposited on to the electrode (applied oxidation potential 0.55 V,  $1.0 \mu\text{mol L}^{-1}$  glucose,  $0.1 \text{ mol L}^{-1}$  NaOH).